



ECOLUXX IP65 T5

Industrial light fittings with IP65



IP65 235 PCE

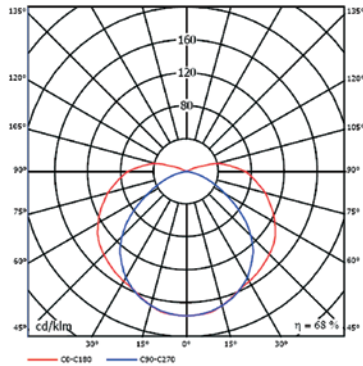

Body:

- PE - High quality glass reinforced pressed polyester body
- P polycarbonate body
- White painted (RAL 9003) metal sheet (standard version)

Optic:

- PS polystyrol cover
- PC polycarbonate cover
- PMMA polymethylacrylate cover

Wiring:

- ECG high frequency ballast
- ECGAD HFB analogue dimmable 1-10 V
- ECGDD HFB digital dimmable

Application:

These light fittings can be used for surface mounting or suspension.

Accessories:

- Suspension hook
- Fixation clip
- Cord suspension
- Protection grid

Versions:

- NZ emergency pack (for version with HFB only)
- P continuous assembly (through wiring)
- AL highly polished aluminium reflector

	&	#	W	A	B	C	X	kg
IP65114 (24) &E #	PC, PS	EP, NZ, P, AL	1x14 (24)	665	84	100	500	1,6
IP65128 (54) &E #	PC, PS	EP, NZ, P, AL	1x28 (54)	1275	84	100	800	3,0
IP65135 (49, 80) &E #	PC, PS	EP, NZ, P, AL	1x35 (49, 80)	1575	84	100	1100	3,9
IP65214 (24) &E #	PC, PS	EP, NZ, P, AL	2x14 (24)	665	135	100	500	1,6
IP65228 (54) &E #	PC, PS	EP, NZ, P, AL	2x28 (54)	1275	135	100	800	3,0
IP65235 (49, 80) &E #	PC, PS	EP, NZ, P, AL	2x35 (49, 80)	1575	135	100	1100	3,9

& - add to the basic code (cover type)

- add to the basic code