



Recessed light fittings for T5 lamps

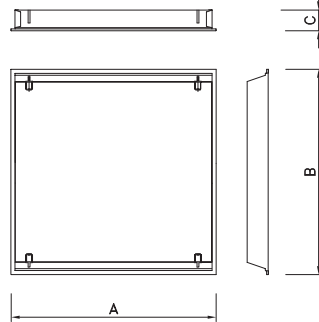

RLF414DPAL

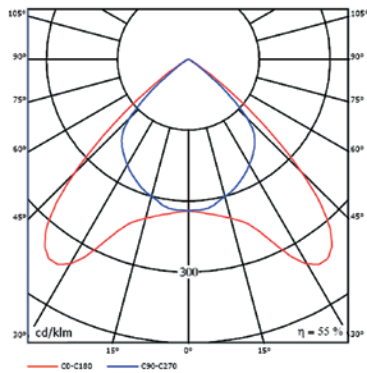

Body:

White painted (RAL 9003) metal sheet

Optic:

DPAL double parabolic louvre category 2 of highly polished aluminium
 DPMAT double parabolic louvre category 2 of mat aluminium

Wiring:

ECG high frequency ballast (standard)
 ECGAD HFB analogue dimmable 1-10V
 ECGDD HFB digital dimmable

Application:


Recessed light fitting for installation into false ceiling with visible supporting structure (600x600 / 625x625 modules) or gypsum plasterboard type ceiling. These fittings are recommended for offices, for lighting areas with high requirements for light and glare control.

Accessories:

Fixing clips for installation into gypsum plasterboard – 54214
 Reduction frame for installing the 600 module light fitting into the 625 module frame

Versions:

600 for 600 module
 625 for 625 module
 K with WIELAND connector
 F with flexible cord
 NZ emergency pack
 OK 2 circuit wiring
 Y perforated cover
 MIRO louvre made of MIRO aluminium
 RAL9006 color RAL 9006



	&	#	W	Module 600			Module 625			C	kg
				A	B		A	B			
RLF214(24)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	2x14(24)	596	296	576x276	622	310	602x290	60	1,9
RLF314(24)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	3x14(24)	596	596	576x576	622	622	602x602	60	3,7
RLF414(24)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	4x14(24)	596	596	576x576	622	622	602x602	60	3,7
RLF228(54)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	2x28(54)	1196	296	1176x276	1246	310	1226x290	60	3,7
RLF328(54)&C1#	DPAL, DPMAT	600, 625, F, NZ, OK, ...	3x28(54)	1196	596	1176x576	1246	622	1226x602	60	6,5
RLF428(54)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	4x28(54)	1196	596	1176x576	1246	622	1226x602	60	6,5
RLF235(49)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	2x35(49)	1496	296	1476x276	1546	310	1526x290	60	4,5
RLF335(49)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	3x35(49)	1496	596	1476x576	1546	622	1526x602	60	8,5
RLF435(49)&C1#	DPAL, DPMAT	600, 625, K, F, NZ, OK, ...	4x35(49)	1496	596	1476x576	1546	622	1526x602	60	8,5

& – used louvre type
 # – add to the basic code
 – cut out