

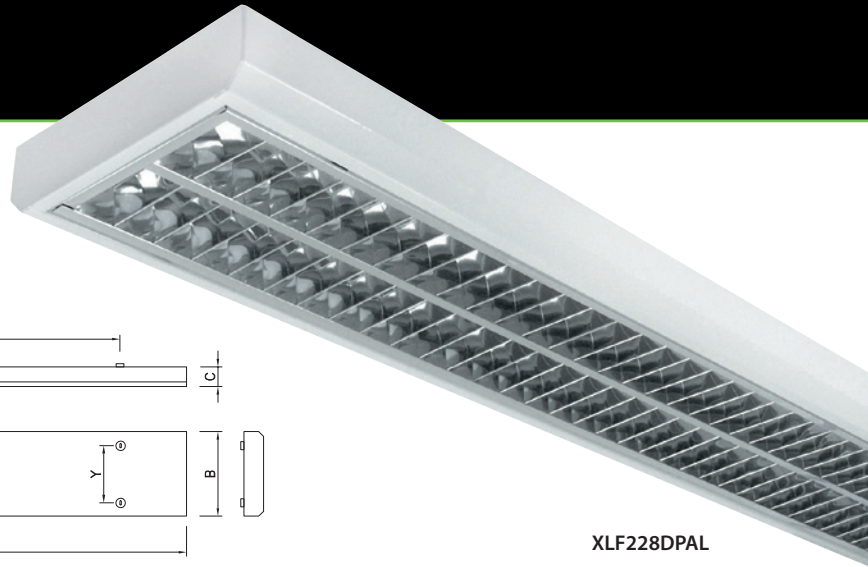


# ECOLUXX XLF T5

## Louvres fittings

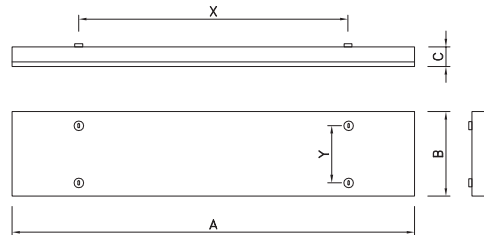

XLF228DPAL

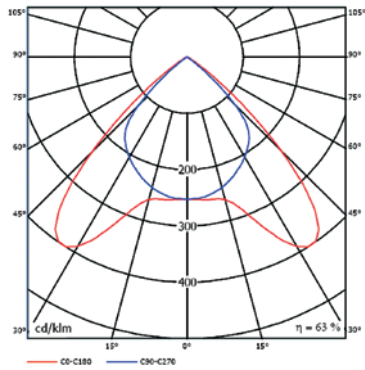

### Body:

White painted (RAL 9003) metal sheet

### Optic:

DPAL double parabolic louvre DPAL T5 category 2 of highly polished aluminium

### Wiring:

ECG high frequency ballast  
 ECGAD HFB analogue dimmable 1-10 V  
 ECGDD HFB digital dim

### Application:

These light fittings can be used for surface mounting or suspension.

### Accessories:

Tube suspension  
 Cord suspension  
 Protection grid OM

### Versions:

NZ emergency pack  
 RAL9006 finished in RAL 9006

### Note:

Recommended as surface mounted fitting. When the light fittings are suspended, they should be hung by 4 cords or tubes.

	#	W	A	B	C	X	Y	kg
XLF128 (54) DPAL	NZ	1x28 (54)	1213	153	65	900	100	3,0
XLF228 (54) DPAL	NZ	2x28 (54)	1213	238	65	900	150	4,0
XLF135 (49) DPAL	NZ	1x35 (49)	1513	153	65	1200	100	4,0
XLF235 (49) DPAL	NZ	2x35 (49)	1513	238	65	1200	150	5,5

# - add to the basic code